




WD.E 50÷150 series


NEW **MAP**
never stop innovating



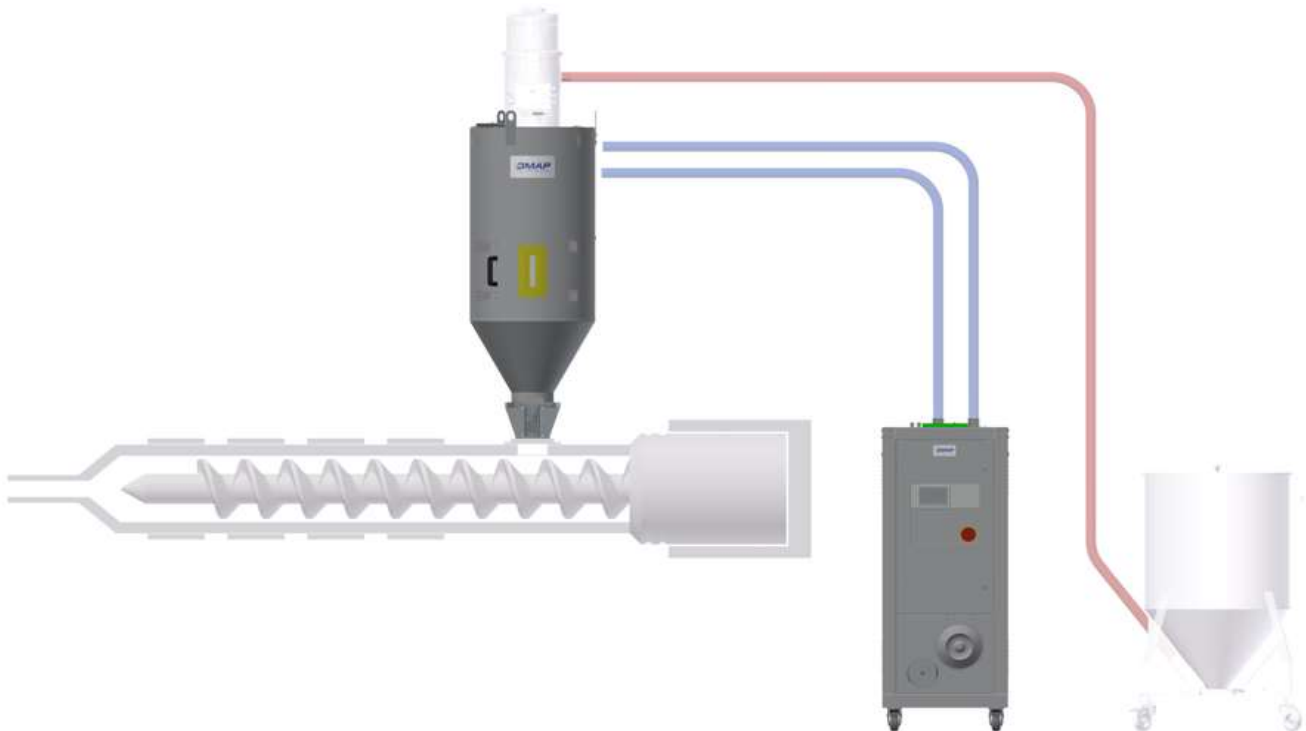

WD.E 50÷150 series

| WD.E | | WD50.E/HT-100 | WD100.E/HT-150 | WD150.E/HT-200 |
|--|-------------------|-----------------|-----------------|-----------------|
| Portata massima <i>Maximum flow</i> | m ³ /h | 50 | 100 | 150 |
| Volume tramoggia <i>Hopper capacity</i> | dm ³ | 100 | 150 | 200 |
| Carrello <i>Trolley</i> | - | No | No | No |
| Tensione & frequenza <i>Voltage & frequency</i> | - | 400V/50Hz/3PH+N | 400V/50Hz/3PH+N | 400V/50Hz/3PH+N |
| Potenza <i>Power</i> | kW | 8 | 8 | 8 |
| Campo di temperature MT <i>MT temperature range</i> | °C | 70 - 150 | 70 - 150 | 70 - 150 |
| Campo di temperature HT <i>HT temperature range</i> | °C | 60 - 170 | 60 - 170 | 60 - 170 |
| Riscaldamento processo <i>Process heating</i> | kW | 4.5 | 4.5 | 4.5 |
| Tubi di collegamento <i>Connecting pipes</i> | ø mm | 51 | 51 | 51 |
| Temperatura dell'acqua in ingresso <i>Inlet water temperature</i> | °C | 18 | 18 | 18 |

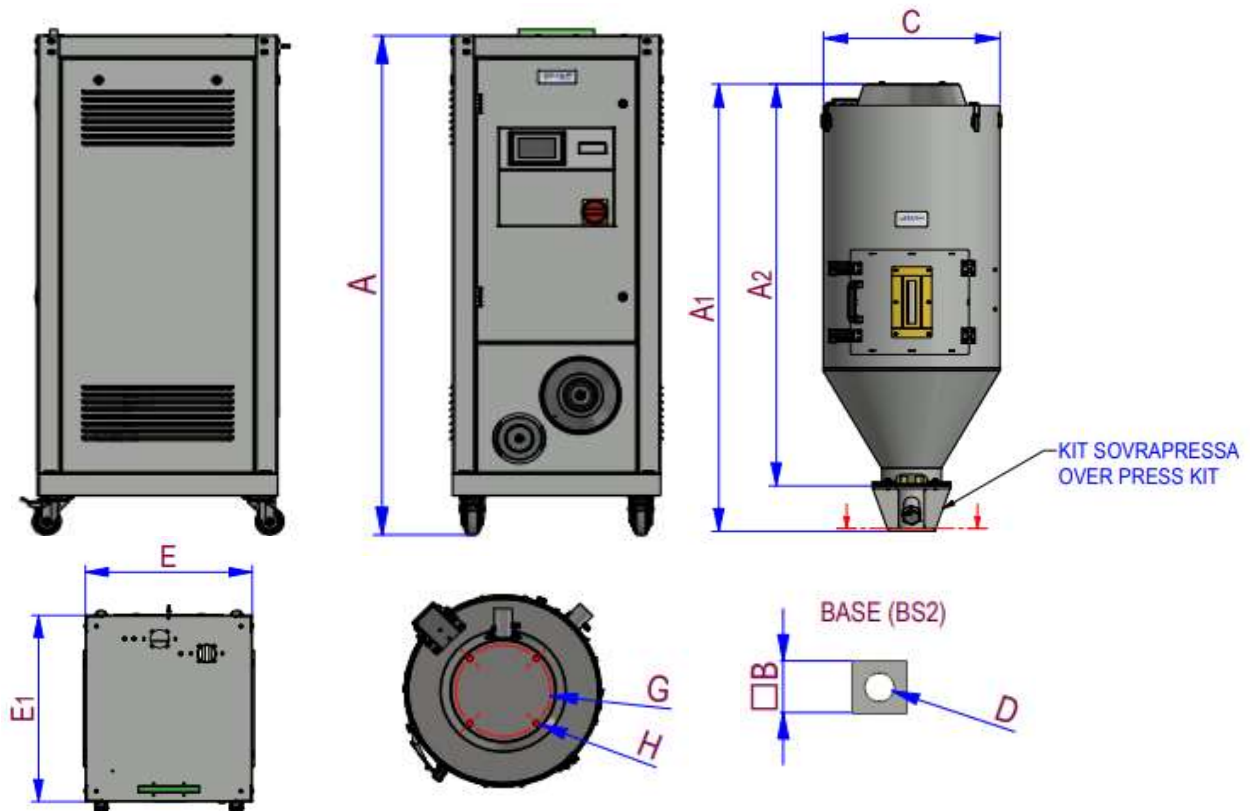

| WD.E | | WD50.E/HT-100 | WD100.E/HT-150 | WD150.E/HT-200 |
|-------|----|---------------|----------------|----------------|
| A | mm | 1375 | 1375 | 1375 |
| A1 | mm | 1125 | 1425 | 1730 |
| A2 | mm | 975 | 1275 | 1580 |
| B | mm | 150 x 150 | 150 x 150 | 150 x 150 |
| C (ø) | mm | 550 | 550 | 550 |
| D (ø) | mm | 76 | 76 | 76 |
| E | mm | 550 | 550 | 550 |
| E1 | mm | 635 | 635 | 635 |
| G | mm | M6 | M6 | M6 |
| H (ø) | mm | 265 | 265 | 265 |